



SMALLEST & LIGHTEST 5 GAS MONITOR

Gas Detection For Life

GX-3R Pro Model



Features

- **Smallest & lightest 5 gas monitor**
— 2.9" W x 2.6" H x 1.06" D , 4.58 ounces
- **Simultaneous detection of 5 gases**
— LEL, O₂, H₂S, CO, and other optional sensors
— H₂ Compensated CO sensor available
- **Simple 2-button operation**
- **Bluetooth communication with iOS & Android App**
- **Non-Compliance Indicator**
- **3 user adjustable alarm levels**
- **Panic Alarm**
- **Man Down Alarm**
- **Impact resistant body**
- **Large full dot, auto-backlit display with auto-rotation**
- **Stealth mode for law enforcement**
- **Field replaceable sensors & filters**
- **Water and dust resistant design, IP66/68**
- **3 Year Warranty**

Applications

- **Personal monitoring**
- **Confined spaces**
- **Refineries / petrochemical**
- **Utilities**
- **Oil and Gas**
- **Water / wastewater**
- **Fire services**
- **Construction**


5 World's Smallest and Lightest
Gas Monitor

The GX-3R Pro is the world's smallest 5-gas monitor weighing only 4.58 ounces and fits in the palm of your hand (2.9" W x 2.6" H x 1.06" D). It simultaneously monitors and displays 5 different gases. In addition to monitoring standard confined space gases, LEL, O₂, CO, & H₂S, the GX-3R Pro has a 5th channel where you can add infrared or toxic gas sensors. Two of the four sensor slots have interchangeable sensors providing flexible configurations, which can easily be changed in the field.

The GX-3R Pro comes equipped with Bluetooth wireless communication, man-down alarm, the choice of alkaline or rechargeable power supply, and a 3 year warranty. The Lithium-ion battery pack will operate for 25 hours and will fully charge in 3 hours.

The GX-3R Pro utilizes Bluetooth communication to display direct gas readings from the instrument to a phone app, which is available free on either iOS or Android phones. Automatic notifications can be programmed to send text or email messages if there is an alarm event from the GX-3R Pro.

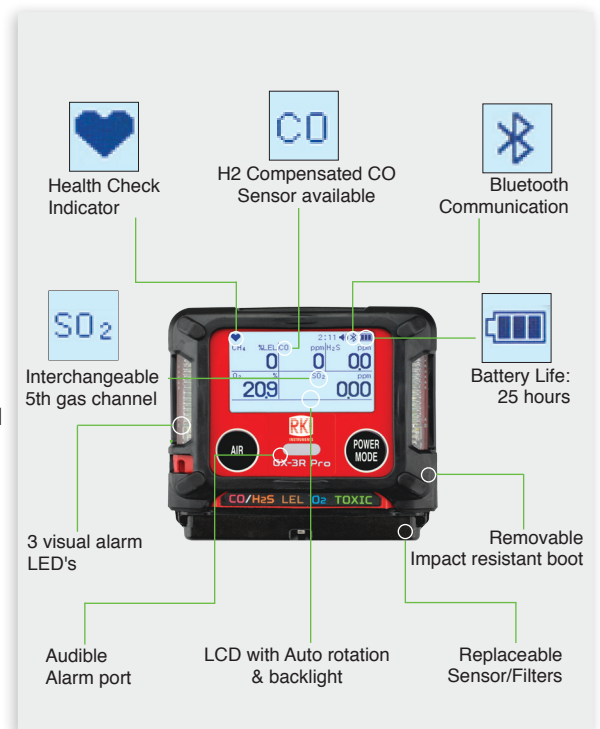

Safety supervisors will appreciate the non-compliance indicator. The instrument flashes it's 3 LED lights every 30 seconds in the following conditions; if the instrument has not been bump tested, or if calibration is due, or if there was a gas alarm event. The 3 LED lights will continue to flash once every 30 seconds until the non-compliance condition has been resolved. The 30 second interval is adjustable.



RKI Instruments, Inc. • 33248 Central Ave. Union City, CA 94587 • Phone (510) 441-5656 • (800) 754-5165 • Fax (510) 441-5650

World Leader In Gas Detection & Sensor Technology
www.rkiinstruments.com

GX-3R Pro Model

Detectable Gases					Common Specifications													
Gas		Measuring Range (Increments)	Accuracy Statement	Preset Alarms	Sampling Method		Display											
Sensor Slot 1: Carbon Monoxide (CO) & Hydrogen sulfide (H2S) <i>Interchangeable</i>					Diffusion sampling standard (hand aspirator or clip-on motorized pump optional)		Full dot LCD with Autobacklight and Autorotation											
H2S / CO	Dual EC	0 ~ 2000 ppm (1 ppm)	± 5% of reading or ± 5 ppm CO	A1: 25 ppm A2: 50 ppm A3: 1200 ppm TWA: 25 ppm STEL: 200 ppm					<table border="1"> <thead> <tr> <th>Gas Alarm</th> <th>Trouble Alarm</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> • 2 increasing alarms • STEL • TWA • Overscale alarm • O2 decreasing/increasing </td> <td> <ul style="list-style-type: none"> • Sensor disconnection • Low battery • Circuit error • Calibration range error • Cal or bump due alarm </td> </tr> </tbody> </table>		Gas Alarm	Trouble Alarm	<ul style="list-style-type: none"> • 2 increasing alarms • STEL • TWA • Overscale alarm • O2 decreasing/increasing 	<ul style="list-style-type: none"> • Sensor disconnection • Low battery • Circuit error • Calibration range error • Cal or bump due alarm 				
		Gas Alarm	Trouble Alarm															
<ul style="list-style-type: none"> • 2 increasing alarms • STEL • TWA • Overscale alarm • O2 decreasing/increasing 	<ul style="list-style-type: none"> • Sensor disconnection • Low battery • Circuit error • Calibration range error • Cal or bump due alarm 																	
0 ~ 200.0 ppm (0.1 ppm)	± 5% of reading or ± 2 ppm H2S	A1: 5 ppm A2: 30 ppm A3: 100 ppm TWA: 1.0 ppm STEL: 5.0 ppm																
H2S Only	EC	0 ~ 200.0 ppm (0.1 ppm)	± 5% of reading or ± 2 ppm H2S	A1: 5 ppm A2: 30 ppm A3: 100 ppm TWA: 1.0 ppm STEL: 5.0 ppm	<table border="1"> <thead> <tr> <th>Gas Alarm</th> <th>Trouble Alarm</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> • Man Down Alarm • Panic Alarm </td> <td> <ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message </td> </tr> </tbody> </table>		Gas Alarm	Trouble Alarm	<ul style="list-style-type: none"> • Man Down Alarm • Panic Alarm 	<ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message 								
Gas Alarm	Trouble Alarm																	
<ul style="list-style-type: none"> • Man Down Alarm • Panic Alarm 	<ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message 																	
CO H2 Compensated	EC	0 ~ 2,000 ppm	± 5% of reading or ± 2 ppm CO	A1: 25 ppm A2: 50 ppm A3: 1200 ppm TWA: 25 ppm STEL: 200 ppm														
Sensor Slot 2: Combustibles (Methane as standard)					<table border="1"> <thead> <tr> <th>Gas Alarm</th> <th>Trouble Alarm</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> • Flashing LED's • Continuous buzzer (100 db @ 30cm) • Flashing gas value • Vibration </td> <td> <ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message </td> </tr> </tbody> </table>		Gas Alarm	Trouble Alarm	<ul style="list-style-type: none"> • Flashing LED's • Continuous buzzer (100 db @ 30cm) • Flashing gas value • Vibration 	<ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message 								
Gas Alarm	Trouble Alarm																	
<ul style="list-style-type: none"> • Flashing LED's • Continuous buzzer (100 db @ 30cm) • Flashing gas value • Vibration 	<ul style="list-style-type: none"> • Flashing LED's • Intermittent buzzer (95 db @ 30cm) • Display of error message 																	
CH4 / HC	Catalytic	0 ~ 100 (1% LEL)	± 5% of reading or ± 2 % LEL	1st: 10% LEL 2nd: 25% LEL 3rd: 50% LEL Over: 100% LEL														
Sensor Slot 3: Oxygen (O2)					<table border="1"> <thead> <tr> <th>Operating Temp. & Humidity</th> </tr> </thead> <tbody> <tr> <td>-20°C ~ +50°C [-4°F ~ +122°F] 10 to 90% RH, non-condensing (continuous environment)</td> </tr> <tr> <td>-40°C ~ +60°C [-40°F ~ +140°F] 0 to 95% RH, non-condensing (temporary environment)</td> </tr> </tbody> </table>		Operating Temp. & Humidity	-20°C ~ +50°C [-4°F ~ +122°F] 10 to 90% RH, non-condensing (continuous environment)	-40°C ~ +60°C [-40°F ~ +140°F] 0 to 95% RH, non-condensing (temporary environment)									
Operating Temp. & Humidity																		
-20°C ~ +50°C [-4°F ~ +122°F] 10 to 90% RH, non-condensing (continuous environment)																		
-40°C ~ +60°C [-40°F ~ +140°F] 0 to 95% RH, non-condensing (temporary environment)																		
O2	EC	0 ~ 40.0% Vol. (0.10%)	± 0.5% O2	Low 1: 19.5% Low 2: 18.0% High: 23.5% Over: 40.0%														
Sensor Slot 4: Toxics & CO2 <i>Interchangeable</i>					<table border="1"> <thead> <tr> <th>Response Time</th> </tr> </thead> <tbody> <tr> <td>Within 30 seconds (T90)</td> </tr> </tbody> </table>		Response Time	Within 30 seconds (T90)										
Response Time																		
Within 30 seconds (T90)																		
SO2	EC	0 ~ 100.0 ppm (0.05 ppm)	± 10% of reading or ± 5 % of full scale	A1: 2 ppm A2: 5 ppm A3: 100 ppm TWA: 0.25 ppm STEL: 0.25ppm														
CO2 %	IR	0 ~ 10.0% Vol. (0.01%)	± 5% of reading or ± 2 ppm	A1: 0.50% Vol. A2: 3.00% Vol. A3: 4.00% Vol. TWA: 0.50% Vol. STEL: 3.00% Vol.	<table border="1"> <thead> <tr> <th>Power Source</th> <th>Config</th> <th>Li-ion</th> <th>Alkaline</th> </tr> </thead> <tbody> <tr> <td>4-gas + EC</td> <td>25 hours</td> <td>16 hours</td> <td></td> </tr> <tr> <td>4-gas + IR</td> <td>16 hours</td> <td></td> <td>7 hours</td> </tr> </tbody> </table>		Power Source	Config	Li-ion	Alkaline	4-gas + EC	25 hours	16 hours		4-gas + IR	16 hours		7 hours
Power Source		Config		Li-ion			Alkaline											
4-gas + EC	25 hours	16 hours																
4-gas + IR	16 hours		7 hours															
CO2 ppm	0 ~ 10,000 ppm (20 ppm)	A1: 5,000 ppm A2: N/A TWA: N/A STEL: N/A																
<p>Calibration Station SDM-3R</p> 			<p>Clip-On Sampling Pump RP-3R</p> 		<table border="1"> <thead> <tr> <th>Case Material</th> </tr> </thead> <tbody> <tr> <td>Explosion proof, dust and water resistant to IP-66/68 (2m,1h) approval. Drop height 23 ft</td> </tr> </tbody> </table>		Case Material	Explosion proof, dust and water resistant to IP-66/68 (2m,1h) approval. Drop height 23 ft										
Case Material																		
Explosion proof, dust and water resistant to IP-66/68 (2m,1h) approval. Drop height 23 ft																		
*Specifications subject to change without notice					<table border="1"> <thead> <tr> <th>Bluetooth Communication</th> </tr> </thead> <tbody> <tr> <td>BLE: with iOS and Android phone app: RK Link</td> </tr> </tbody> </table>		Bluetooth Communication	BLE: with iOS and Android phone app: RK Link										
Bluetooth Communication																		
BLE: with iOS and Android phone app: RK Link																		
					<table border="1"> <thead> <tr> <th>Datalogging</th> </tr> </thead> <tbody> <tr> <td>Logs user ID, station ID, Calibration & Bump Test history, Alarm Events & Alarm Trends</td> </tr> </tbody> </table>		Datalogging	Logs user ID, station ID, Calibration & Bump Test history, Alarm Events & Alarm Trends										
Datalogging																		
Logs user ID, station ID, Calibration & Bump Test history, Alarm Events & Alarm Trends																		
					<table border="1"> <thead> <tr> <th>Standard Accessories</th> </tr> </thead> <tbody> <tr> <td>Alligator clip, protective rubber boot, charger, calibration adapter</td> </tr> </tbody> </table>		Standard Accessories	Alligator clip, protective rubber boot, charger, calibration adapter										
Standard Accessories																		
Alligator clip, protective rubber boot, charger, calibration adapter																		
					<table border="1"> <thead> <tr> <th>Optional Accessories</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> • Padded carrying case • RP-3R Attachable sampling Pump with 4" rubber nipple, 10' hose and probe (up to 40' hose available) • USB to IrDA downloading cable for datalogger • SDM-3R calibration station • Hand aspirator </td> </tr> </tbody> </table>		Optional Accessories	<ul style="list-style-type: none"> • Padded carrying case • RP-3R Attachable sampling Pump with 4" rubber nipple, 10' hose and probe (up to 40' hose available) • USB to IrDA downloading cable for datalogger • SDM-3R calibration station • Hand aspirator 										
Optional Accessories																		
<ul style="list-style-type: none"> • Padded carrying case • RP-3R Attachable sampling Pump with 4" rubber nipple, 10' hose and probe (up to 40' hose available) • USB to IrDA downloading cable for datalogger • SDM-3R calibration station • Hand aspirator 																		
					<table border="1"> <thead> <tr> <th>Safety Design / Approvals</th> </tr> </thead> <tbody> <tr> <td>ATEX, CSA</td> </tr> </tbody> </table>		Safety Design / Approvals	ATEX, CSA										
Safety Design / Approvals																		
ATEX, CSA																		
					<table border="1"> <thead> <tr> <th>Warranty</th> </tr> </thead> <tbody> <tr> <td>Three years material and workmanship including sensors</td> </tr> </tbody> </table>		Warranty	Three years material and workmanship including sensors										
Warranty																		
Three years material and workmanship including sensors																		



INSTRUMENTS
Gas Detection For Life

(800) 754-5165

www.rkiinstruments.com

Authorized Distributor: